

TAŚMA LED 12V / SMD 3528 - 600 / IP65

LED STRIPS 12V / SMD 3528 - 600 / IP65

PREMIUM




PRODUKTY UZUPEŁNIAJĄCE ADDITIONAL PRODUCTS

art.no: DIMMER 2.4G 4-ZONES ROTATING WHEEL RF
art.no: DIMMER 2.4G RECEIVER SINGLE COLOR



art.no: PS-MOD-50W12V4.17A

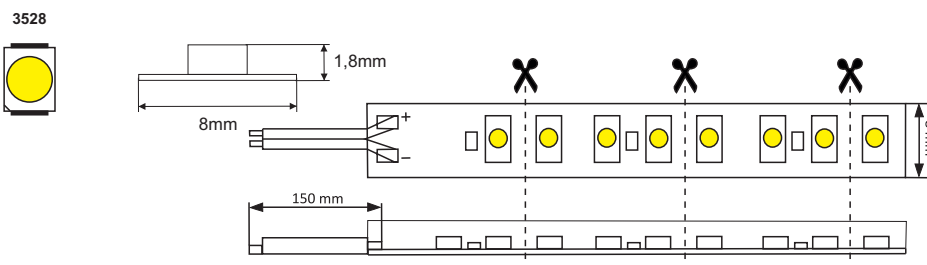

	LS5600WW- _WB_EX	LS5600NW- _WB_EX	LS5600W- _WB_EX
	5908293907813	5908293915443	5908293907806
	65	65	65
	48W (9,6W/m)	48W (9,6W/m)	48W (9,6W/m)
	4A (0,8A/m)	4A (0,8A/m)	4A (0,8A/m)
	12V DC	12V DC	12V DC
	6lm/led	6lm/led	7lm/led
	2800-3000K	4000-4500K	6000-6500K
	3528	3528	3528
	600 (120led/m)	600 (120led/m)	600 (120led/m)
	120°	120°	120°
	5m	5m	5m
	8mm	8mm	8mm
	2m*	2m*	2m*
PCB	Podwójne Double	Podwójne Double	Podwójne Double
	50000h	50000h	50000h
	-30/+45	-30/+45	-30/+45

*Odległość pomiędzy punktami zasilania na taśmie gwarantująca minimalne spadki napięcia i optymalne parametry świecenia
*The distance between the power supply points of the LED strip which ensures minimum voltage drop and optimum lighting parameters is 2m

