



**DOWNLIGHTY PODTYNKOWE OKRĄGLE**  
**DOWNLIGHTS ROUND RECESSED MOUNTED**



		lm				PF	CRI									
--	--	----	--	--	--	----	-----	--	--	--	--	--	--	--	--	--

PF028535	5908293928535	585	6,5W	100-240V AC	120mA	>0,5	> 80	20	120°	3000K	2835	∅100x75x35	95%<1s	30000	≥35000	-20/+40
PF028542	5908293928542	585	6,5W	100-240V AC	120mA	>0,5	> 80	20	120°	4000K	2835	∅100x75x35	95%<1s	30000	≥35000	-20/+40

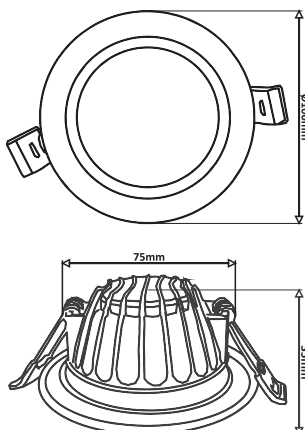

**nextec**

W skład oprawy wchodzi wbudowane lampy LED.

**A++**  
**A+**  
**A**  
**C**  
**D**

**LED**

Nie można wymienić lamp w oprawie.

874/2012

BARWA / COLOUR / LICHTFARBE