



DOWNLIGHTY PODTYNKOWE OKRĄGŁE
DOWNLIGHTS ROUND RECESSED MOUNTED



		lm				PF	CRI								
--	--	----	--	--	--	----	-----	--	--	--	--	--	--	--	--

PF028559	5908293928559	450	5W	100-240V AC	240mA	>0,5	> 80	20	38°	3000K	2835	Ø95x75x40	95%<1s	30000 ≥35000	-20/+40
PF028566	5908293928566	450	5W	100-240V AC	240mA	>0,5	> 80	20	38°	4000K	2835	Ø95x75x40	95%<1s	30000 ≥35000	-20/+40

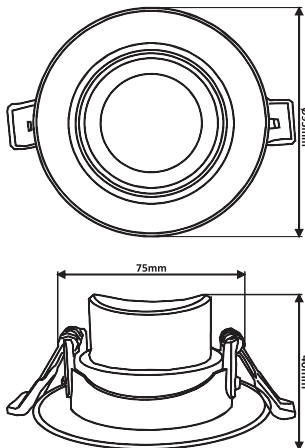

nextec

W skład oprawy wchodzi wbudowane lampy LED.

A++
A+
A
C
D

LED

Nie można wymieniać lamp w oprawie.

874/2012

