

TAŚMA LED 12V / SMD 5630 - 300 / IP33

LED STRIPS 12V / SMD 5630 - 300 / IP33

PREMIUM




PRODUKTY UZUPEŁNIĄCE

ADDITIONAL PRODUCTS

art.no: DIMMER 2.4G 4-ZONES ROTATING WHEEL RF
 art.no: DIMMER 2.4G RECEIVER SINGLE COLOR



art.no: PS-MOD-100W12V8.33A

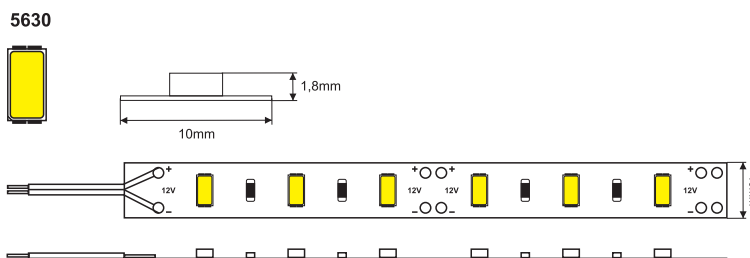

	LS5300WW 5630-G_WB_EX	LS5300NW 5630-G_WB_EX	LS5300W 5630-G_WB_EX
	5908293916556	5908293918598	5908293916563
	33	33	33
	90W (18W/m)	90W (18W/m)	90W (18W/m)
	7,5A (1A/m)	7,5A (1A/m)	7,5A (1A/m)
	12V DC	12V DC	12V DC
	35lm/led	37lm/led	40lm/led
	2800-3000K	4000-4500K	6000-6500K
	5630	5630	5630
	300 (60led/m)	300 (60led/m)	300 (60led/m)
	120°	120	120°
	5m	5m	5m
	10mm	10mm	10mm
	3m*	3m*	3m*
PCB	Podwójne Double	Podwójne Double	Podwójne Double
	50000h	50000h	50000h
	-10/+45	-10/+45	-10/+45

*Odległość pomiędzy punktami zasilania na taśmie gwarantująca minimalne spadki napięcia i optymalne parametry świecenia

*The distance between the power supply points of the LED strip which ensures minimum voltage drop and optimum lighting parameters is 2m

